

EQUIPMENT RANGE

NOTHING IS OUT OF REACH



LinCon

www.lincon.com.au

1300 546 266

OUR COMPANY

LinCon works to the highest standards to deliver on every promise and go the extra mile for our customers.

Our team of certified high risk licensed operators bring the expertise and next level of Elevated Work Platform (EWP) capabilities to the projects we work on.

LinCon's EWP Equipment and experienced operators offer quality lifting solutions for tight access and at height work sites on varied projects across a wide range of industries.

Our modern EWPs offer the highest level of safety, enabling workers to efficiently access hard to reach site locations without compromising on safety or site compliance.

These quality EWPs are built to enable construction, power, industrial, telecommunications, renewables and logistics businesses to complete large scale, complicated projects effectively and efficiently.





EVERYTHING'S POSSIBLE

We aim high.
We work to the highest standards.

We have the highest expectations
of ourselves and go the extra mile
for our customers.

NOTHING IS OUT OF REACH.


EWP EQUIPMENT



www.lincon.com.au


1300 546 266

13m - MODEL: P130

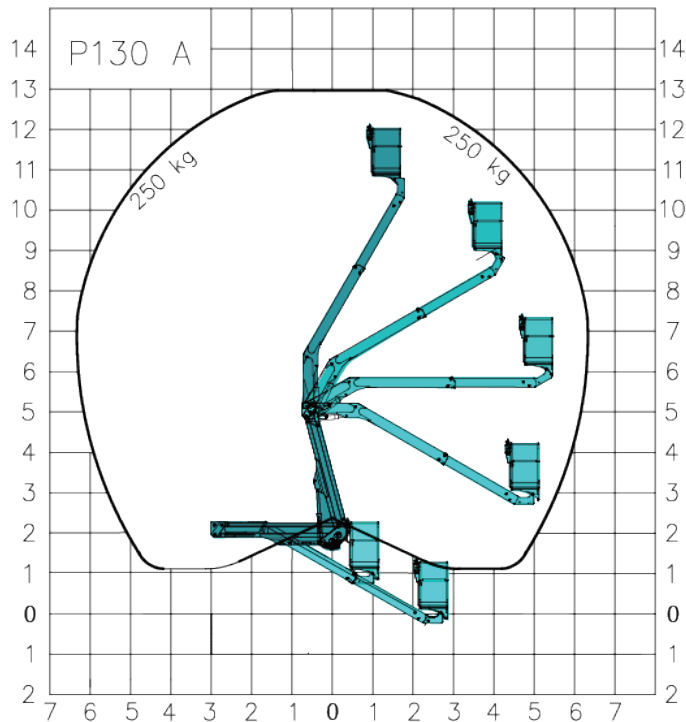


Working Height: P130	13.0m (max)
Vehicle Weight	3,000kg
Travel H,L,M	2.3m x 5.6m x 2.0m
Horizontal Reach	6.2m (max)
Basket Capacity	250kg (max)
Drive Type	4x2 and 4x4

20m - MODEL: P200

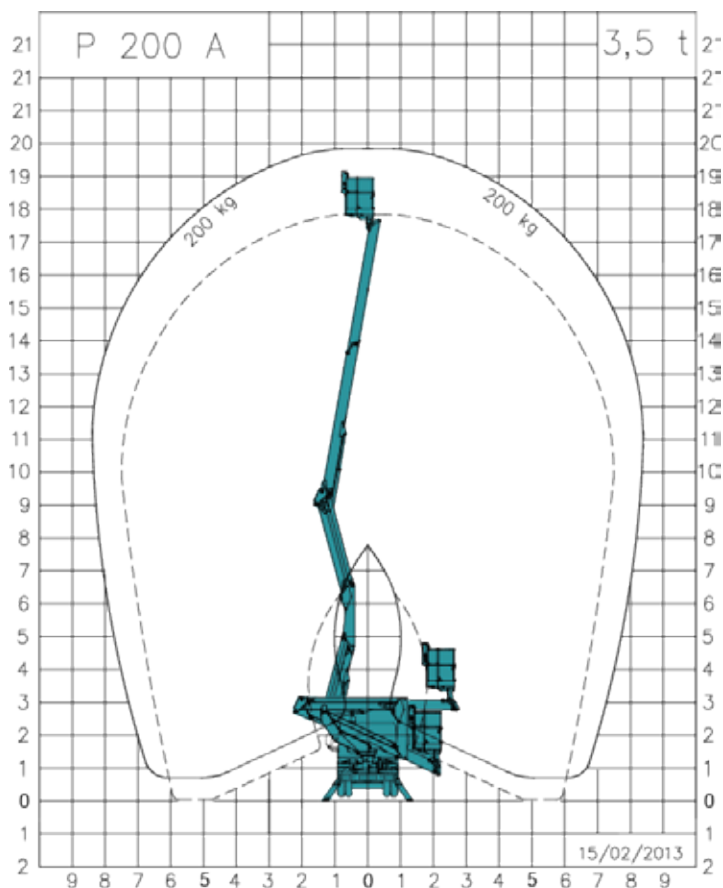


Working Height: P200	19.8m (max)
Vehicle Weight	4,660kg
Travel H,L,M	2.9m x 5.4m x 2.1m
Horizontal Reach	8.4m (max)
Basket Capacity	230kg (max)
Drive Type	4x2 and 4x4

21m - MODEL: P210

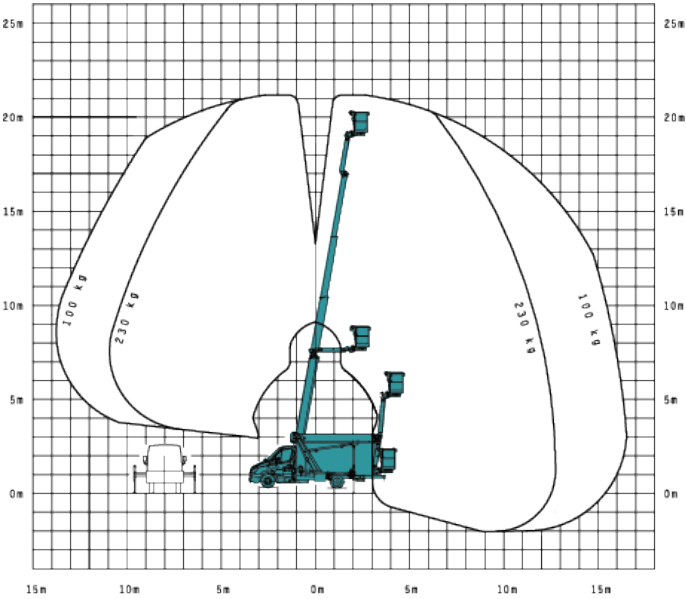


Working Height	21.0m (max)
Vehicle Weight	4,750kg
Travel H,L,M	3.0m x 7.9m x 2.1m
Horizontal Reach	16.6m (max)
Basket Capacity	230kg (max)
Drive Type	4x2

26m - MODEL: P260

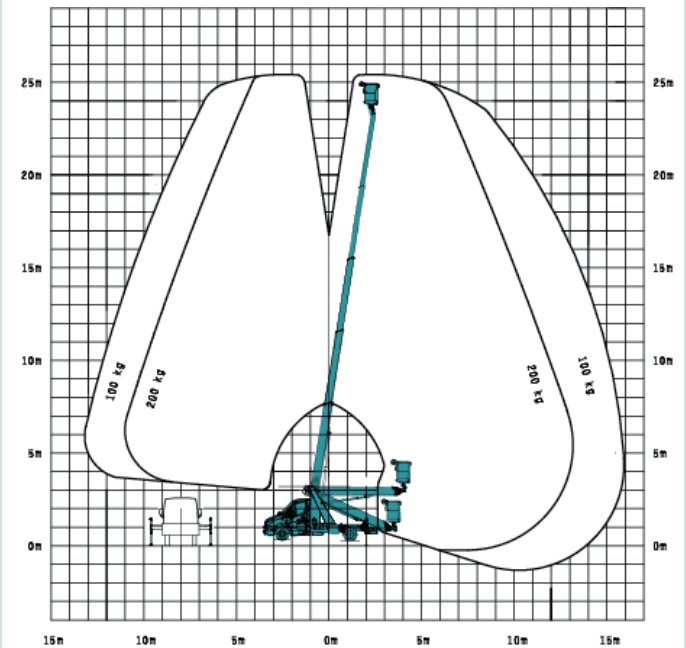


Working Height	26.0m (max)
Vehicle Weight	4,760kg
Travel H,L,M	3.3m x 7.4m x 2.2m
Horizontal Reach	14.4m (max)
Basket Capacity	200kg (max)
Drive Type	4x2

28m - MODEL: P280

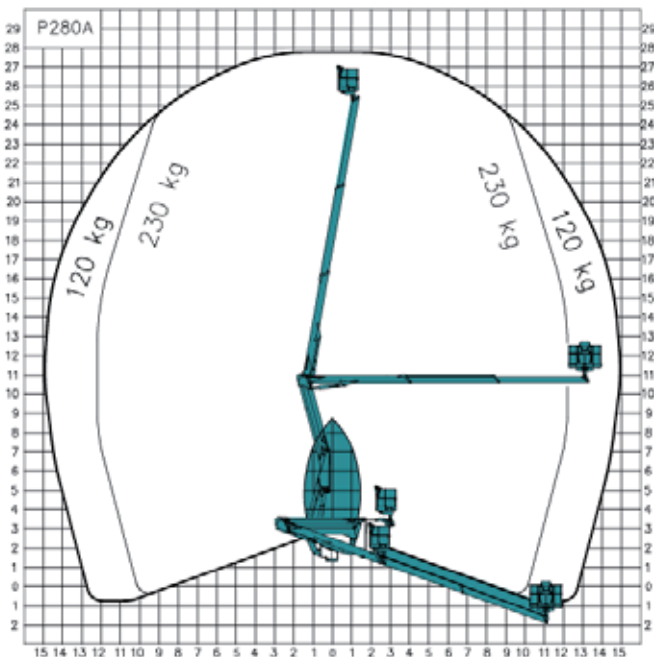


Working Height	28.0m (max)
Vehicle Weight	10,000kg
Travel H,L,M	3.8m x 7.5m x 2.5m
Horizontal Reach	15.0m (max)
Basket Capacity	300kg (max)
Drive Type	4x4

30m - MODEL: P300

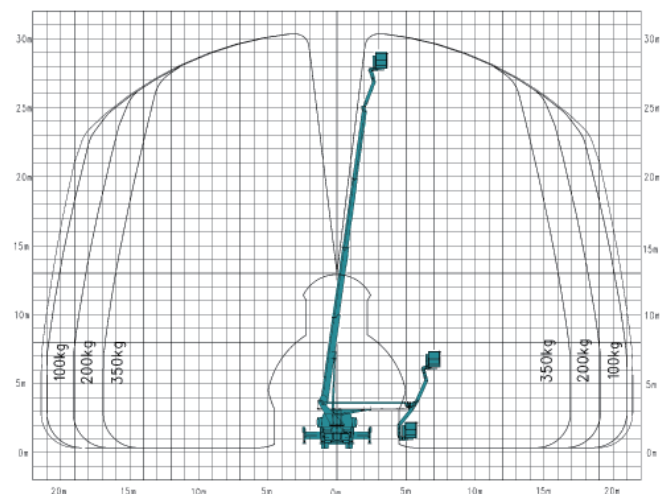


Working Height	30.0m (max)
Vehicle Weight	11,280kg
Travel H,L,M	3.9m x 8.5m x 2.5m
Horizontal Reach	20.5m (max)
Basket Capacity	350kg (max)
Drive Type	4x2 and 4x4

32m - MODEL: WT320

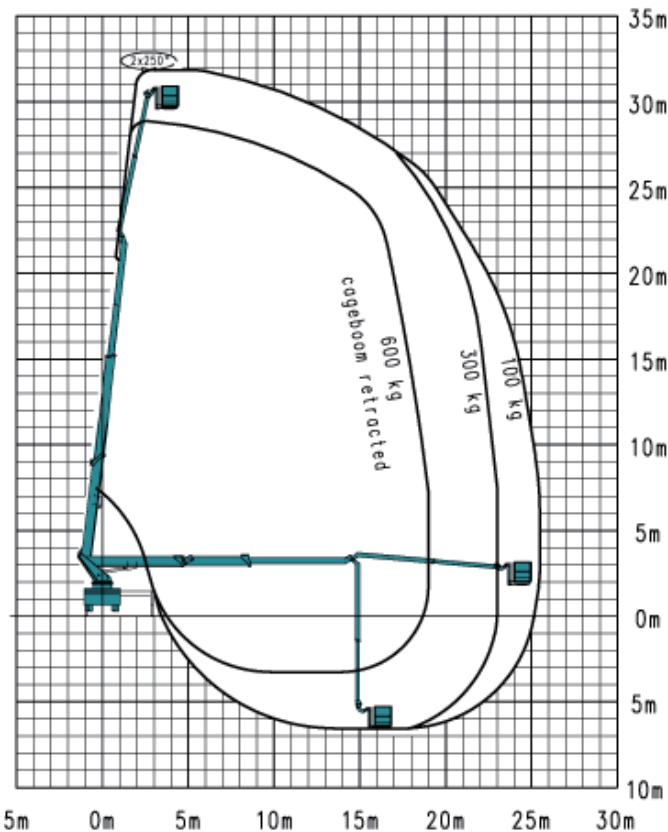


Working Height	32.0m (max)
Vehicle Weight	16,320kg
Travel H,L,M	3.9m x 8.3m x 2.5m
Horizontal Reach	25.5m (max)
Basket Capacity	600kg (max)
Drive Type	4x4

37m - MODEL: P370

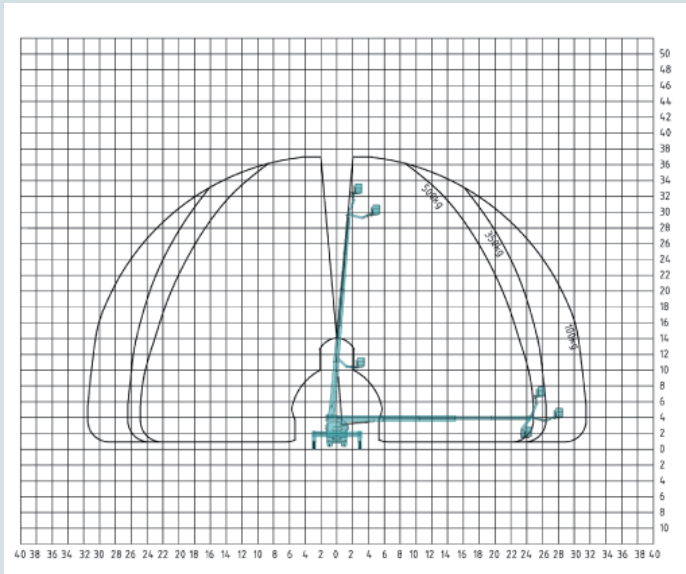


Working Height	37.0m (max)
Vehicle Weight	17,040kg
Travel H,L,M	4.0m x 8.7m x 2.5m
Horizontal Reach	31.7m (max)
Basket Capacity	500kg (max)
Drive Type	4x4

45m - MODEL: WT450

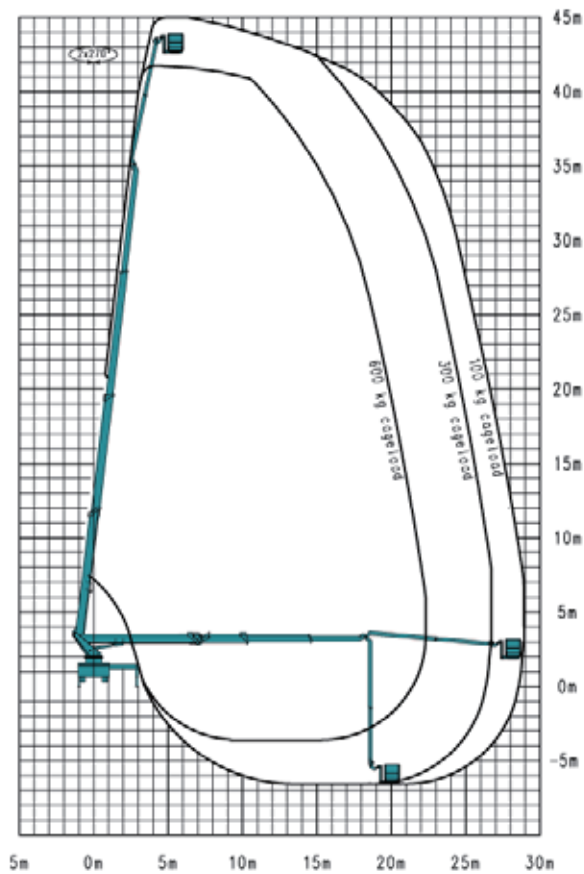


Working Height	45.0m (max)
Vehicle Weight	24,480kg
Travel H,L,M	4.1m x 10.5m x 2.5m
Horizontal Reach	28.7m (max)
Basket Capacity	600kg (max)
Drive Type	6x6

48m - MODEL: P480

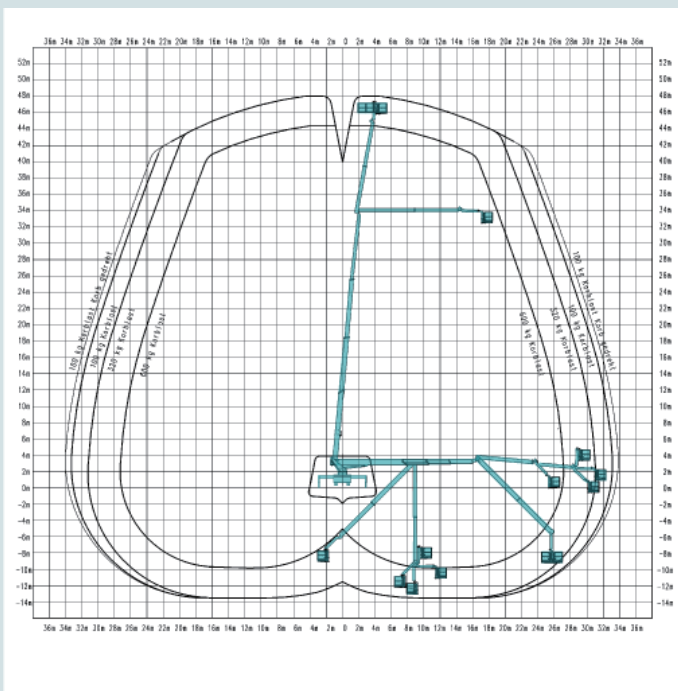


Working Height	48.0m (max)
Vehicle Weight	26,130kg
Travel H,L,M	4.2m x 10.1m x 2.5m
Horizontal Reach	33.1m (max)
Basket Capacity	600kg (max)
Drive Type	6x6

53m - MODEL: WT530

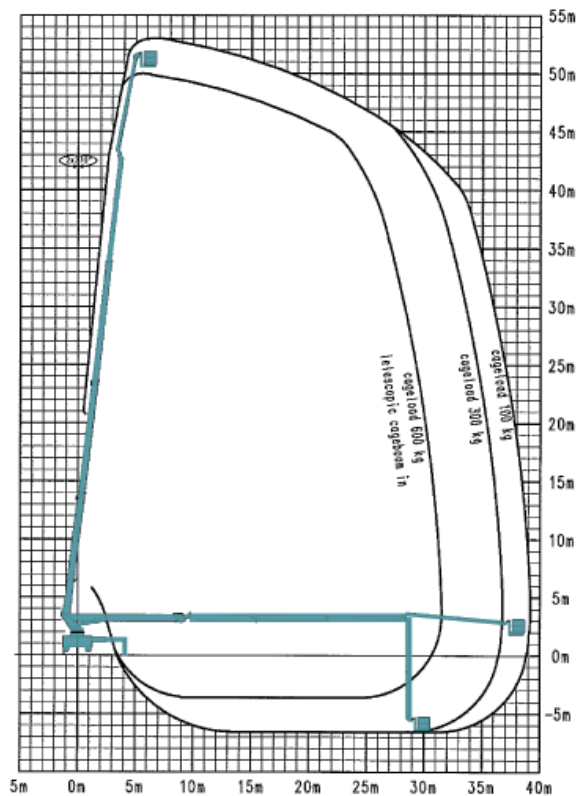


Working Height	53.0m (max)
Vehicle Weight	32,970kg
Travel H,L,M	4.2m x 12.0m x 2.5m
Horizontal Reach	39.0m (max)
Basket Capacity	600kg (max)
Drive Type	8x8

57m - MODEL: P570

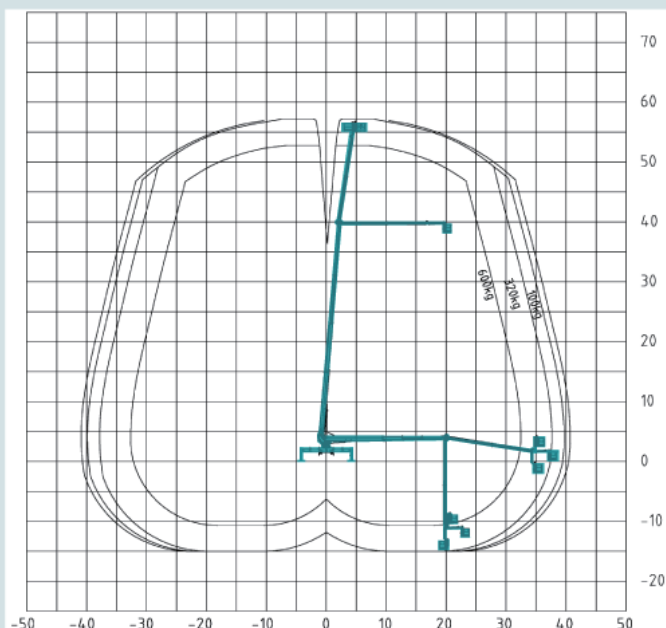


Working Height	57.0m (max)
Vehicle Weight	29,840kg
Travel H,L,M	4.2m x 11.8m x 2.5m
Horizontal Reach	40.1m (max)
Basket Capacity	600kg (max)
Drive Type	6x6

61m - MODEL: WT610

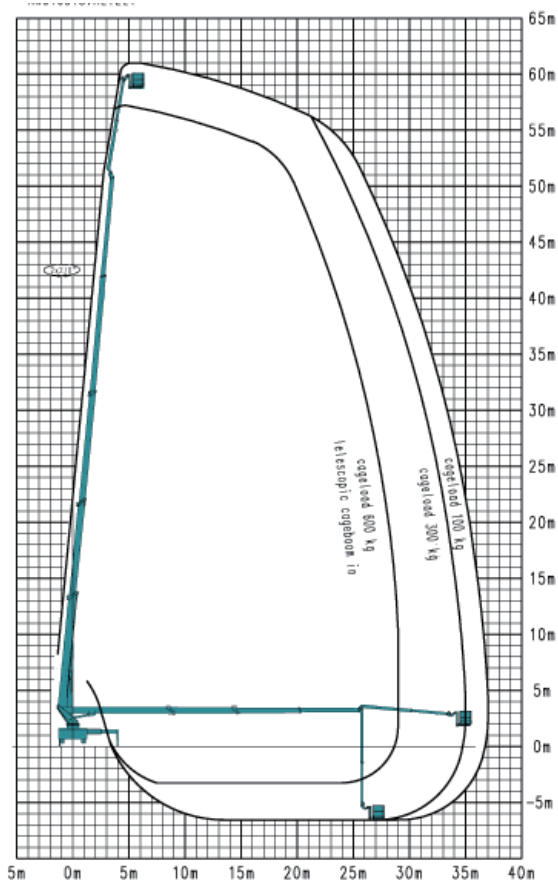


Working Height	61.0m (max)
Vehicle Weight	35,000kg
Travel H,L,M	4.3m x 11.9m x 2.5m
Horizontal Reach	37.5m (max)
Basket Capacity	600kg (max)
Drive Type	8x8

70m - MODEL: WT700

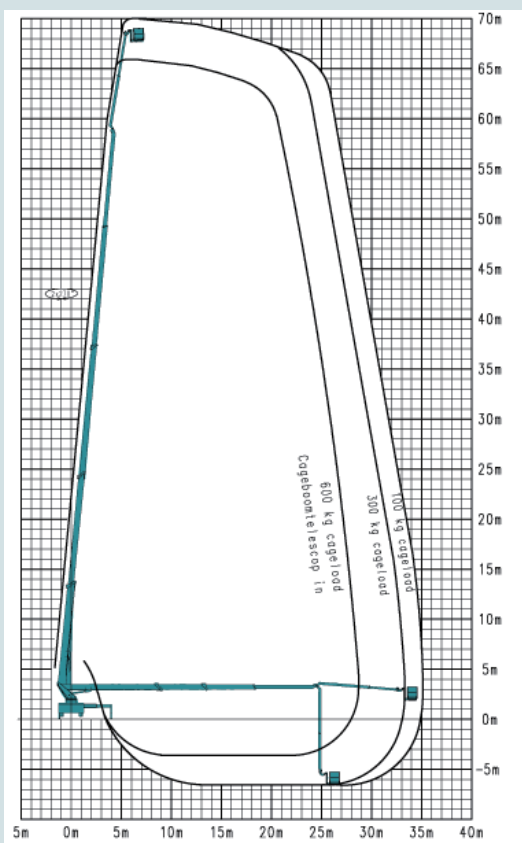


Working Height	70.0m (max)
Vehicle Weight	36,380kg
Travel H,L,M	4.3m x 13.9m x 2.5m
Horizontal Reach	35.7m (max)
Basket Capacity	600kg (max)
Drive Type	8x8

75m - MODEL: P750

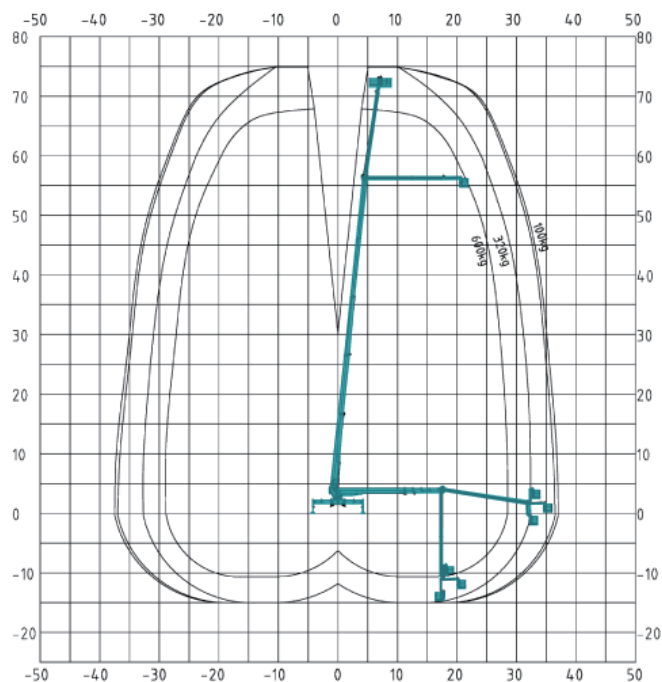

Working Height	75.0m (max)
Vehicle Weight	36,640kg
Travel H,L,M	4.2m x 14.1m x 2.5m
Horizontal Reach	37.5m (max)
Basket Capacity	600kg (max)
Drive Type	8x8

103m - MODEL: WT1000

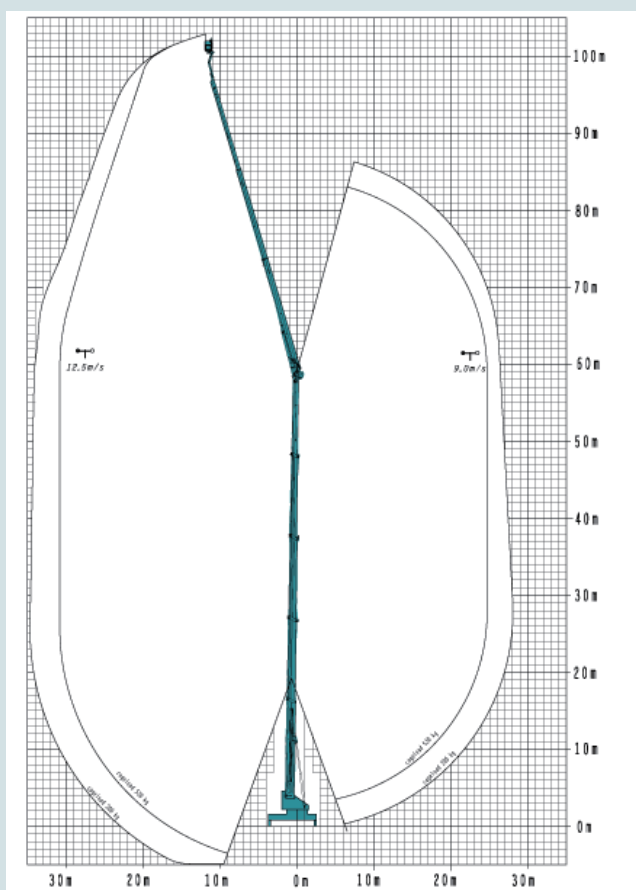

Working Height	103.0m (max)
Vehicle Weight	60,000kg
Travel H,L,M	4.0m x 16.5m x 2.8m
Horizontal Reach	36.0m (max)
Basket Capacity	530kg (max)
Drive Type	10 x 8

LIVE LINE EQUIPMENT



www.lincon.com.au

1300 546 266

OUR LIVE LINE UNITS


Our range of live line units are built to enable the maintenance and repair of live overhead lines, including live line bare hand work, repairs and general maintenance, and live line insulator washing.

These units are designed for work on sub-transmission and transmission lines of up to 500KV, while the system is still live.


Our live line units bring greater versatility, manoeuvrability, increased productivity, and are more compact than comparable products to deliver the most efficient solution for your overhead lines project work.

OUR MODELS

- 51m Bronto Sky Lift SI 169 - Telescopic Bare Hand Tested to 500Kv
- 55m Bronto Sky Lift SI 178 – Telescopic Bare Hand Tested to 500Kv
- 60m Bronto Sky Lift SI 196 – Telescopic Bare Hand Tested to 500Kv
- 65m Palfinger Live Line Insulator Washer – Telescopic Bare Hand Tested to 500Kv

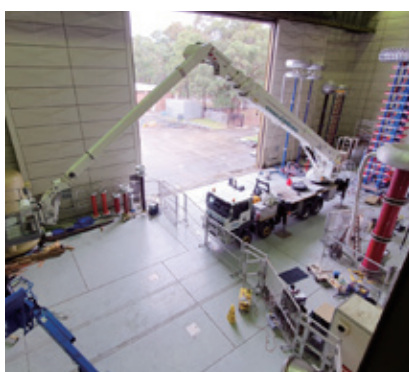


51m - MODEL: SI169

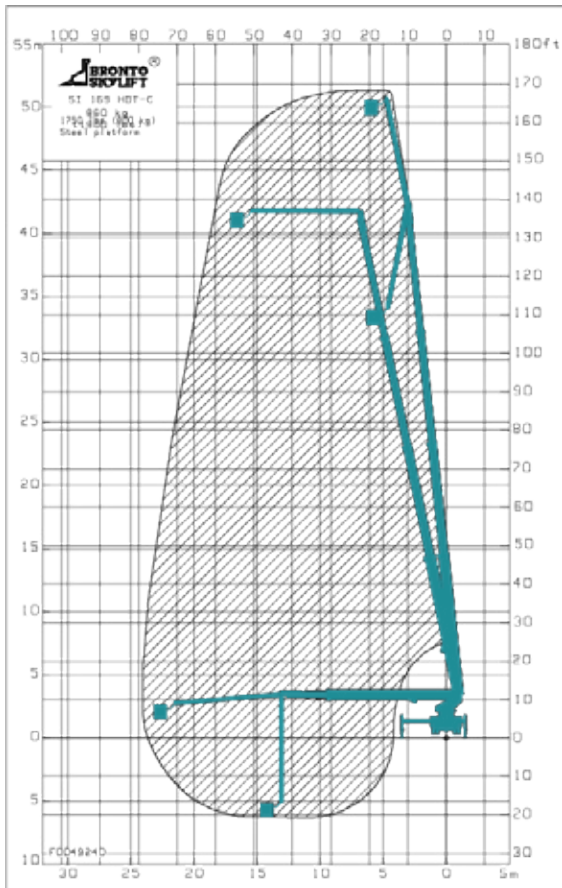


Working Height	51m (max)
Vehicle Weight	34,140kg
Travel H,L,M	4.3m x 13.3m x 2.5m
Horizontal Reach	24m (max)
Basket Capacity	450kg (max)
Drive Type	8 x 8

55m - MODEL: SI178

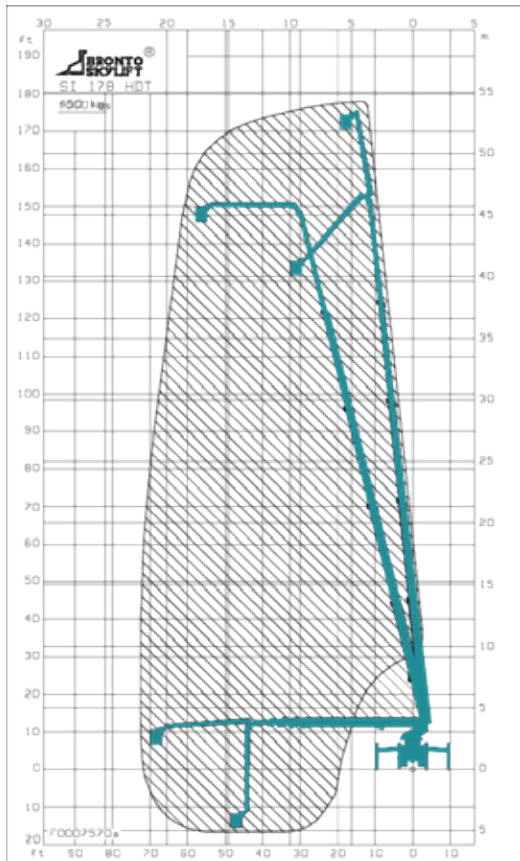


Working Height	55m (max)
Vehicle Weight	34,290kg
Travel H,L,M	4.4m x 12.9m x 2.5m
Horizontal Reach	22.2m (max)
Basket Capacity	450kg (max)
Drive Type	8x8

60m - MODEL: SI196

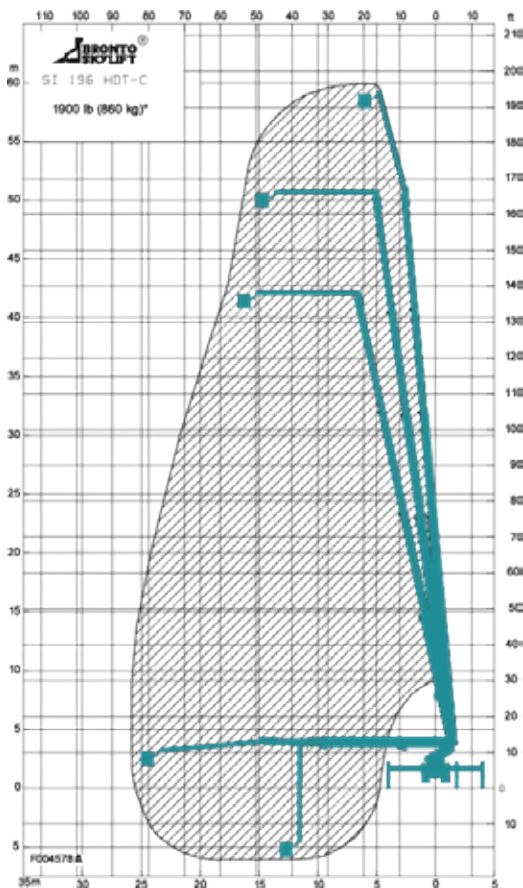

Working Height	60.0m (max)
Vehicle Weight	37,820kg
Travel H,L,M	4.4m x 12.8m x 2.5m
Horizontal Reach	26.0m (max)
Basket Capacity	500kg (max)
Drive Type	8x8

65m - MODEL: P650i

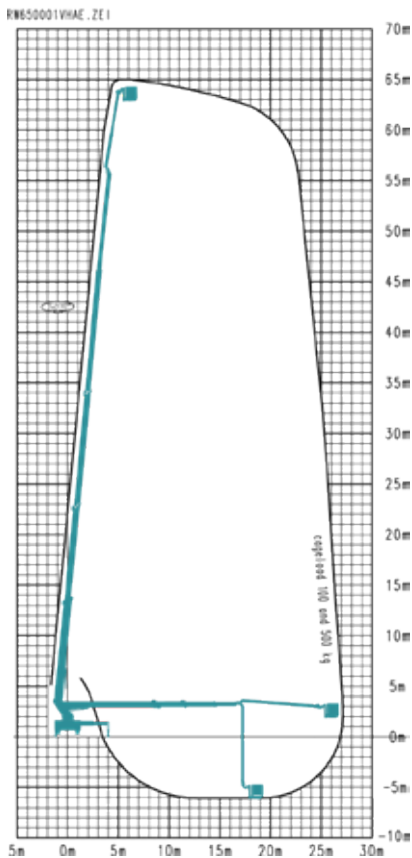

Working Height	65.0m (max)
Vehicle Weight	36,650kg
Travel H,L,M	4.2m x 13.9m x 2.5m
Horizontal Reach	27.0m (max)
Basket Capacity	500kg (max)
Drive Type	8x8

UNDERBRIDGE AND RAIL UNITS



www.lincon.com.au

1300 546 266

UNDERBRIDGE AND RAIL UNITS

Our range of underbridge and rail units are built to enable inspection and maintenance works on road and railway bridges, using an articulated boom with either a basket or multi-person platform for maximum reach and extension. These units offer efficient manoeuvrability, agility, and safe operation in difficult to access sites.


- Barin ABC60 Under Bridge Inspection Unit
- Barin AB70 Under Bridge Inspection Unit
- Barin AB 16SL Under Bridge Inspection Unit
- Barin AB 16SM Under Bridge Inspection Unit
- Barin AB22 Under Bridge Inspection Unit
- Barin AB23 Under Bridge Inspection Unit

BARIN AB 10.5 COMBI

Built for inspection and maintenance jobs on bridges, viaducts, and railways – the AB 10.5 Combi facilitates inspections and light maintenance projects on rail and road bridges.




6m - MODEL: ABC60

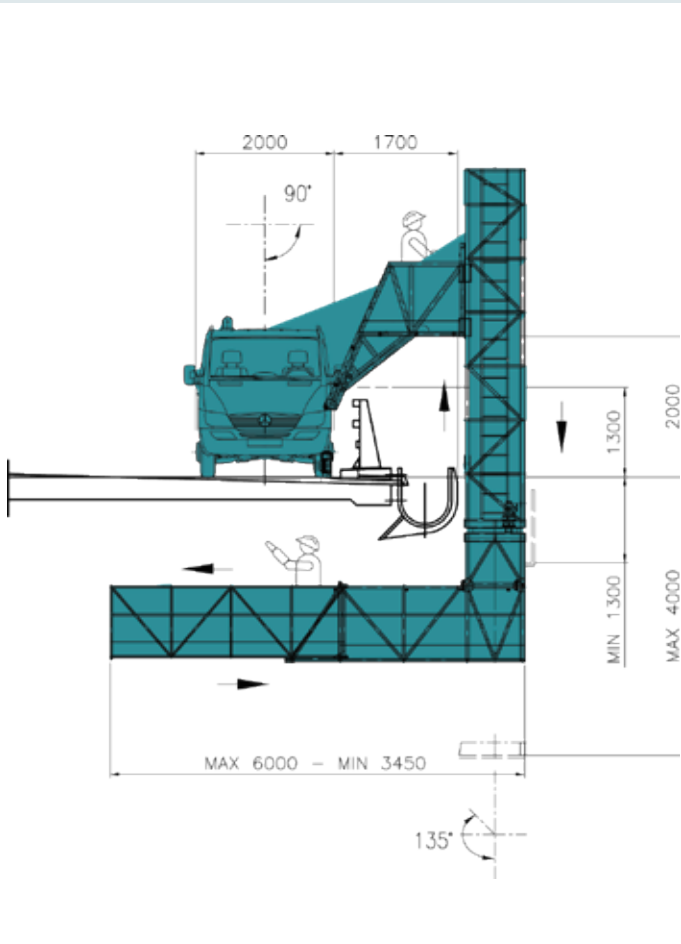


Working Height	6.0m (max)
Platform Downward Reach	4.0m (max)
Vehicle Weight	4,900kg
Travel H,L,M	3.9m x 7.7m x 2.0m
Basket Capacity	300kg (max)
Drive Type	4x2

7m - MODEL: ABC70

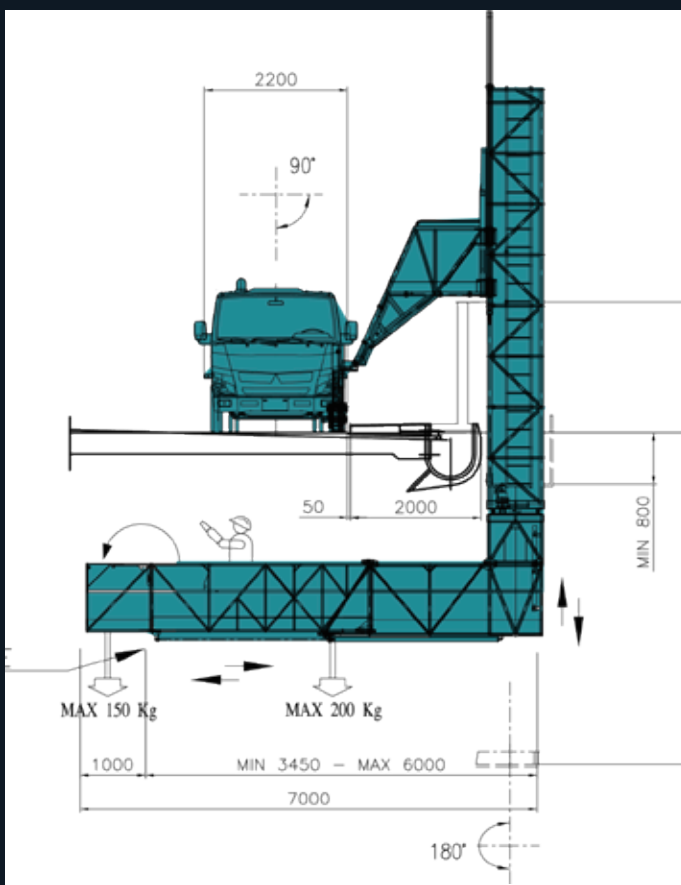


Working Height	7.0m (max)
Platform Downward Reach	5.0m (max)
Vehicle Weight	7,700kg
Travel H,L,M	3.9m x 9.0m x 2.5m
Basket Capacity	350kg (max)
Drive Type	4x2

16m - MODEL: AB16SL

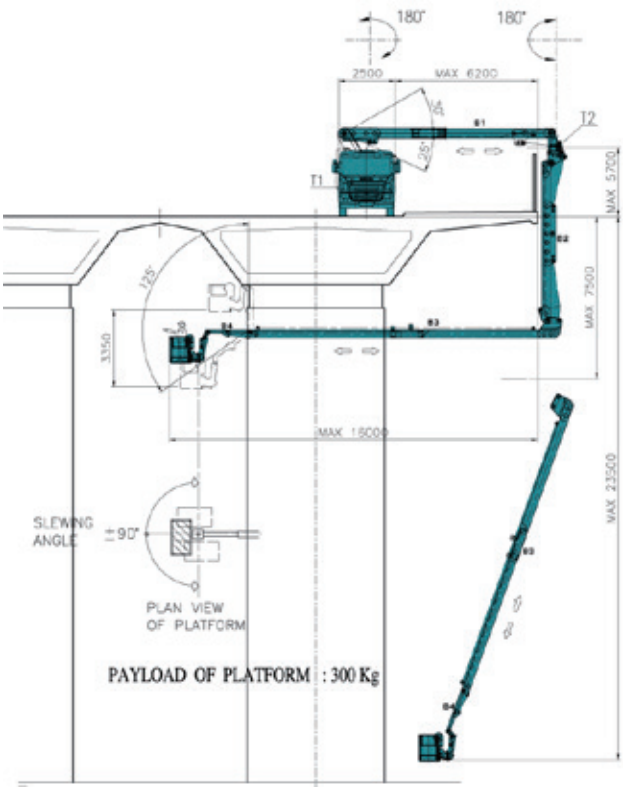

Working Height	16.0m (max)
Platform Downward Reach	23.5m (max)
Vehicle Weight	38,390kg
Travel H,L,M	4.0m x 12.5m x 2.5m
Basket Capacity	300kg (max)
Drive Type	8x4

16m - MODEL: AB16SM

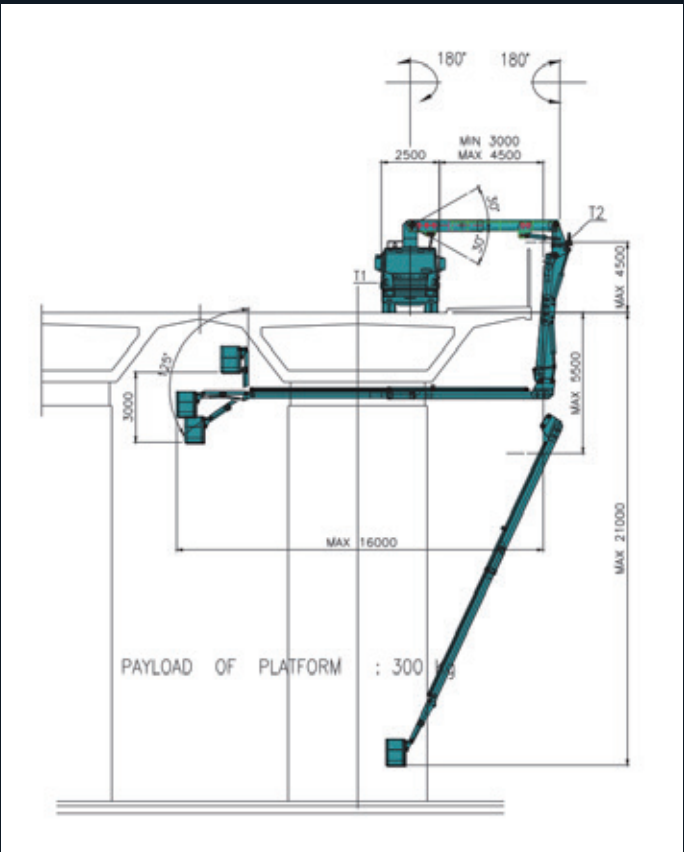


Working Height	16.0m (max)
Platform Downward Reach	23.5m (max)
Vehicle Weight	27,850kg
Travel H,L,M	3.9m x 11.9m x 2.5m
Basket Capacity	300kg (max)
Drive Type	8x4

18m - MODEL: ABC180




Working Height	18.0m (max)
Platform Downward Reach	9.1m (max)
Vehicle Weight	33,520kg
Travel H,L,M	4.0m x 12.0m x 2.5m
Basket Capacity	550kg (max)
Drive Type	8x4

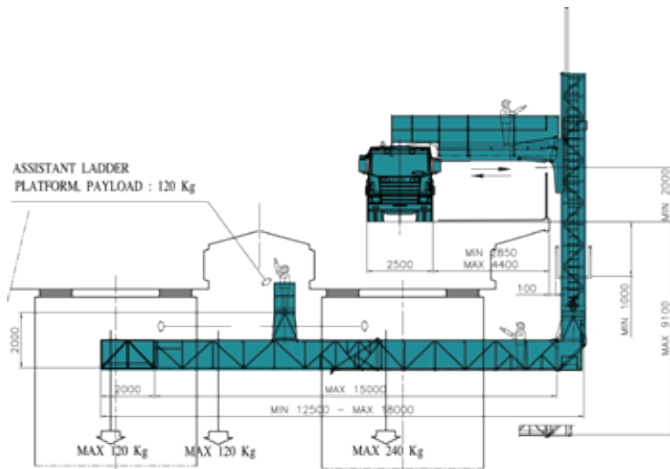


22m - MODEL: ABC22



Working Height	22.0m (max)
Platform Downward Reach	27.5m (max)
Vehicle Weight	33,690kg
Travel H,L,M	4.0m x 12.6m x 2.5m
Basket Capacity	300kg (max)
Drive Type	8x4

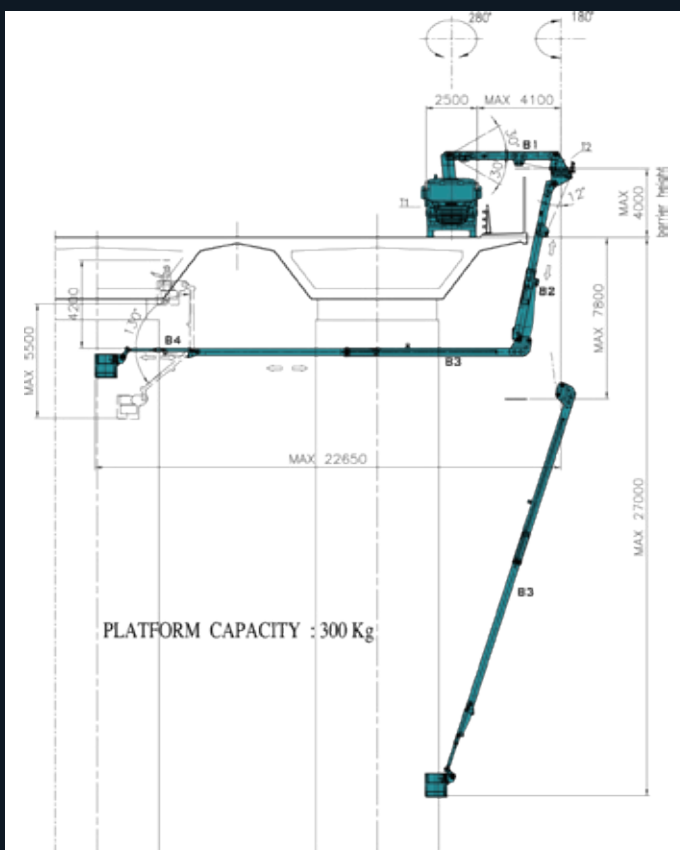

23m - MODEL: AB23

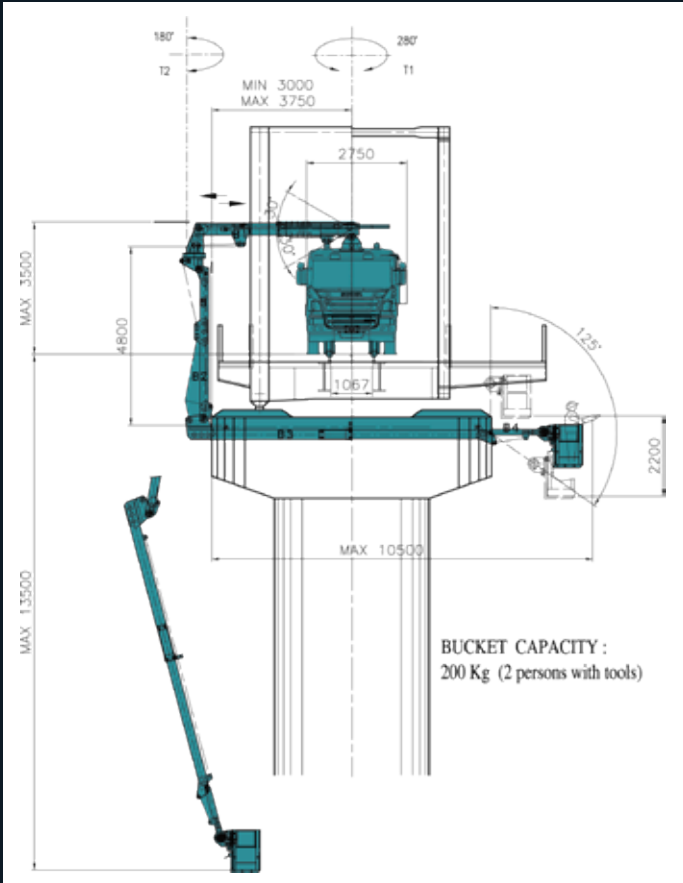


Working Height	23m (max)
Platform Downward Reach	28m (max)
Vehicle Weight	33,700kg
Travel H,L,M	4.0m x 12.7m x 2.5m
Basket Capacity	300kg (max)
Drive Type	8 x 4

10.5m - MODEL: AB10.5



Working Height	10.5m (max)
Platform Downward Reach	14.0m (max)
Vehicle Weight	23,450kg
Travel H,L,M	3.7m x 10.5m x 2.5m
Basket Capacity	200kg (max)
Drive Type	6x4 and Rail

OUR OFFICE LOCATIONS

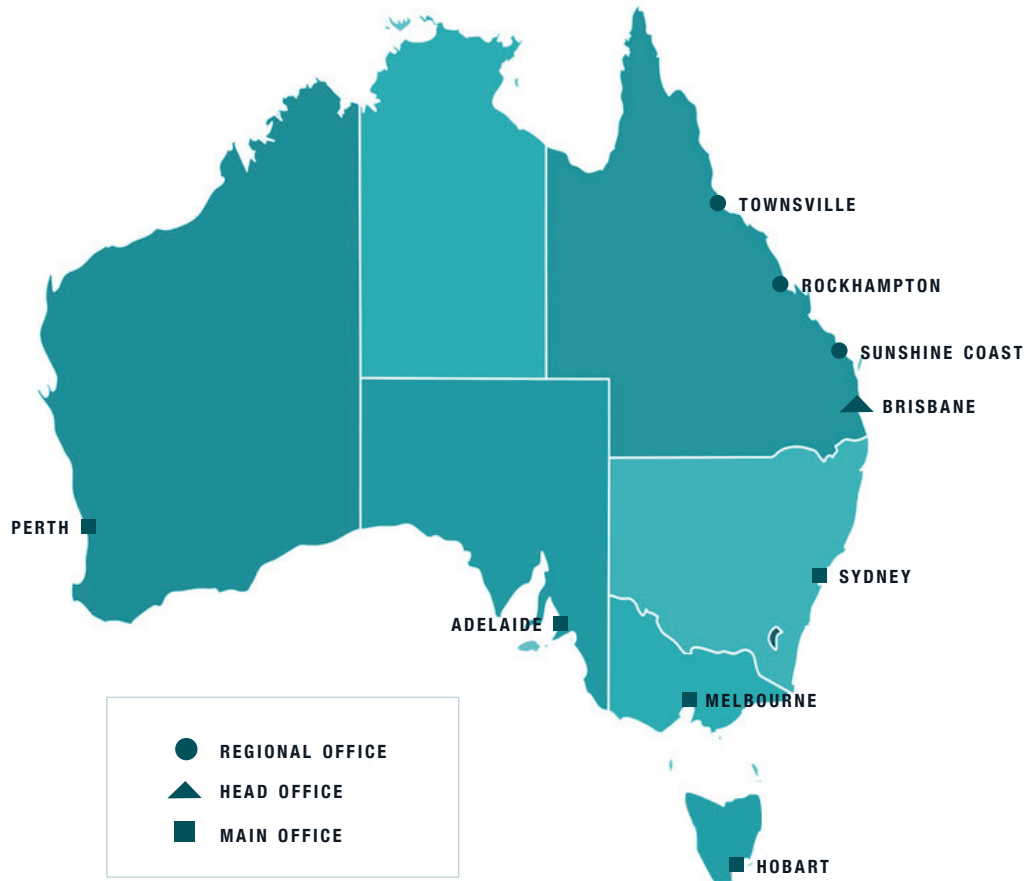

Lincon has been the Australasian agent for Palfinger and Barin equipment, since 2001. During this period we have successfully satisfied many government and Large corporations with our reliable and diverse range of equipment; supported by the very best OEM trained service technicians.



"Lifetime of Excellence"



"We challenge the impossible"

LinCon

PH: 1300 546 266

www.lincon.com.au

hire@lincon.com.au

NOTHING'S OUT OF REACH ————— EVERYTHING IS ————— POSSIBLE.

LinCon is proudly 100% Australian owned.

We pride ourselves on providing our clients with an extensive fleet of modern and reliable equipment backed by unrivalled levels of service, consistently exceeding expectations.

BRISBANE | QLD HEAD OFFICE

17 Westcombe Street,
Darra, QLD 4076

P: 07 3712 0780

F: 07 3712 0782

E: hire@lincon.com.au

SYDNEY | NSW

35B Heathcote Road,
Moorebank, NSW 2170

P: 1300 546 266

M: 0459 032 929

MELBOURNE | VIC

11A Mareno Road,
Tullamarine, VIC 3043

P: 1300 546 266

M: 0412 820 661

HOBART | TAS

233 Kennedy Drive,
Cambridge, TAS 7170

P: 1300 546 266

M: 0448 714 424

ADELAIDE | SA

138 Mooringe Road,
North Plympton, SA 5037

P: 1300 546 266

M: 0448 090 238

PERTH | WA

47 Logue Road,
Millendon, WA 6056

P: 1300 546 266

M: 0427 115 611