

5SDK8



ENGINEERED FOR TOUGH CONDITIONS.

STANDARD FEATURES

- Option of 4 in 1 or G.P. bucket
- High Lift Capacity
- Assist Grips
- Two-point Seatbelt
- Multiple Safety Interlock System
- Load Handling Pedal Control
- Low Vibration and Low Fatigue Control Levers
- Shock-Reducing Bucket Feature
- Toyota's Safety System
- ROPS/FOPS (ISO) Guard
- Front and Rear Work Lights
- Overhead Instrument Panel
- Oil Pressure Warning Lights
- Fuel and Temperature Gauges
- Self-Levelling System on Lift
- Lifting Hook

650kg

(SAE) Operating Load



1800 425 439

www.toyotaskidsteerloader.com.au



**TOP DOG
IN THE
DIRT.**




5SDK8

650kg (SAE) Operating Load
39kW (52HP) @ 2,400 rpm
62 lpm @ 2,400 rpm

**TESTED IN AUSTRALIA TO HANDLE
THE TOUGHEST CONDITIONS**

Built for the job and made for the operator, the Toyota Huski 5SDK8 skid steer loader has a spacious cabin opening for smooth entry and exit, along with an easy to read instrument panel and low vibration and low fatigue control levers, provide for outstanding operator comfort. Class leading visibility and outstanding manoeuvrability makes the 5SDK8 skid steer loader a valuable addition to any worksite.

Availability and specifications are subject to change without notice.

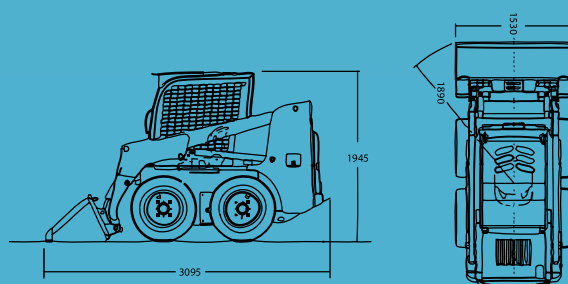

ENGINE

Model	TOYOTA DZ-II*	
Piston Displacement	cc	2486
Rated Power / r.p.m.	kW	39/2400
Rated Torque / r.p.m.	Nm	160/1600

CONTROLS

Type	HST
Steering	Forward, reverse, variable speed. Two Hand Lever.
Drive	Two Hydrostatic Transmissions with infinitely variable speed

FUEL

Fuel Capacity (Litres)	85
-------------------------------	-----------

* Includes 4SDK4 and 5SDK models, please consult your local Toyota Material Handling Branch for details.

PERFORMANCE

Tipping Load (SAE)	kg	1300
Operating Load (SAE)	kg	650
Ground Clearance (centre)	mm	275
Machine Weight (with fuel & std bucket)	kg	2660
Dump Height (dump angle 40°)	mm	2190
Reach Fully Raised (dump angle 40°)	mm	510
Dump Angle (max.)	deg	45
Raising Time (full load)	sec	4.0
Lowering Time (no load)	sec	2.5
Dump Time	sec	2.4
Travel Speed	Forward	km/h 12.0
	Reverse	km/h 12.0
Clearance Circle (with bucket)	mm	1890
Gradeability	Forward	% 30
	Reverse	% 57

THE HUSKI RANGE



4SDK4
320kg



5SDK5
430kg



5SDK8
650kg



5SDK9
730kg



5SDK10
820kg



5SDK11
900kg



1800 425 439
www.toyotaskidsteerloader.com.au



Toyota Material Handling Australia (TMHA) has used its best endeavours to ensure brochure information is correct when published. All images are used for illustration purposes only and actual colour of products may differ from images displayed. TMHA, to the extent permissible at law, is not liable to any person for loss or damage arising from reliance upon information contained in this brochure. Distributed nationally by Toyota Material Handling Australia Pty Limited ABN 38 104 644 635. 8 Secombe Place Moorebank NSW 2170. Printed May 2016.